





## I INTRODUCTION

All fossil fuels, coal, petroleum, and natural gas, contain carbon and hydrogen and were the remains of organic matter produced by photosynthesis which occurred as a result of millions of years of geological evolution. These fuels are nonrenewable and will ultimately be come to an end. As they rely upon limited resources and their distributions on earth are greatly restricted in certain areas of the world, they will become expensive. In addition, energy production from fossil fuels including coal, petroleum and natural gas via combustion irreversibly damages the environment with pollutants and causes greenhouse gas emission [1]. In order to maintain the future of the world with a cleaner environment, renewable energy is the only choice compared to other energy sources. Renewable energy sources include solar energy, wind energy, geothermal energy, nuclear energy, ocean energy, hydrogen, and biomass [2]. Biomass is the chemically stored energy in plant and animal tissues, which can be used as an alternative fuel. It is regarded as one of the most important resources on the earth. Besides a biological sustenance for ecosystem, biomass has a wide area of use from fabrics, medicines, valuable chemicals to construction materials [3].

The chemical composition of biomass depends greatly on the various types of tissues found in plant and animal species. In general, plant structure is composed of long-chain polysaccharides, a short-chain polysaccharides, and amorphous complex phenolic compounds. The polysaccharide fraction consists of glucose monomers linked together in long chains or polymers [4-5]. Biomass used in order to obtain energy includes herbaceous and woody energy crops, forestry crops and their residues, industrial residues, animal and food residues, municipal solid waste and sewage. The process of

converting these sources of biomass with the purpose of energy into valuable products can be classified as two categories: biological conversion and thermal conversion. The thermal biomass conversion process can be divided into four main groups: combustion, liquefaction, pyrolysis, and gasification [6-9]. Among these conversion processes, pyrolysis, thermal decomposition of biomass in the inert atmosphere, is a promising technology for liquid oil production, biochar and gases [10]. Bio-oil obtained from the pyrolysis of biomass contains so many simple and complex compounds from aliphatics, furans to oxygenates and inorganics species. Pyrolysis gas comprises mainly of CO<sub>2</sub>, CO, CH<sub>4</sub> and H<sub>2</sub> and some other light hydrocarbons. Biochar mainly contains elemental carbon and carbonaceous compounds along with hydrogen and various inorganic species in small quantities [9]. The term thermal analysis (TA) is a general term describing analytical instrumental technique which analyzes the behavior of a substance as a function of varying time and temperature. The most basic thermal analysis techniques are differential scanning calorimetry (DSC), differential thermal analysis (DTA), thermomechanical analysis (TMA), thermo-optical analysis (TOA) and thermogravimetric analysis. Thermogravimetric analysis or thermal gravimetric analysis (TGA) is a technique used for determining the overall mass of the analyte as a temperature-dependent property in a controlled atmosphere. The kinetic analysis of biomass can be carried out under different types of temperature programs, such as isothermal [11], and non-isothermal [12-13]. These types of the temperature programs entail handling the data to regress the kinetic parameters using different methods [14]. According to the atmosphere used, thermo-gravimetric analysis is employed frequently as an analytical method under nitrogen

[13], oxygen [15], air [16], helium [17], and argon [18-19] atmospheres. Empirical kinetics classified as a one-step single model [20], competing model [21], parallel model [22], or parallel-series model [23, 24] have also lately been used in various pyrolysis studies. Many researchers have investigated the pyrolysis kinetics of energy crops [25-27] and agricultural residues [28-30].

There have in general been two different of methods using non-isothermal data to evaluate the kinetic parameters used in the following equation known as the Arrhenius equation.

$$\frac{dm}{dt} = -Ae^{-E/RT}m \quad (1)$$

where  $m$  is weight fraction,  $t$  the reaction time,  $A$  the pre-exponential or frequency factor,  $E$  the activation energy,  $T$  the absolute temperature and  $R$  is the universal gas constant. In order to solve Eq. (1) one of the methods used directly requires a linearization of the Eq. (1) by dividing by the mass and then taking the logarithm or natural logarithm of both sides. The resulting equation is shown Eq. (2) and is known as the derivative method.

$$\ln\left(-\left[\frac{dm}{dt}\right]/m\right) = \ln(A) - \frac{E}{RT} \quad (2)$$


Eq.(2) is a linearized form and when  $\ln\left(-\left[\frac{dm}{dt}\right]/m\right)$  is plotted on the ordinate and  $1/T$  is plotted on the abscissa, the graph will yield a straight line when the thermal decomposition reaction is first-order. The slope of this line gives the activation energy, and the pre-exponential factor can be calculated from the ordinate intercept. The most frequently used method for calculating kinetic parameters from non-isothermal data is to employ an integral method. This method is much simpler than the derivative. Integrating the right-hand side of Eq. (1) has no analytical solution and for the exact solution, there are many methods reported in the literature. One of

the methods is the Coats and Redfern method which employs an approach of the integral form of an infinite sum [14,31].

In this study, the pyrolysis behavior of the stalks of an energy crop, *Cynara Cardunculus* was investigated by means of thermogravimetric analysis (TGA). The kinetic parameters,  $A$ , and  $E$  of the biomass were calculated using the Coats-Redfern method.

## II THERETICAL BACKGROUND

One of the most applied kinetic models in the literature is the Coats-Redfern approximation [32-42]. Because biomass is a multi-component material that is comprised of lignin and carbohydrates (cellulose and hemi-cellulose), it is not easy to investigate the different and complex pyrolysis reactions individually. A simple kinetic approach to modelize the scheme. Thermal decomposition of the biomass in a solid state is the one-step first order rate model [43]. The overall pyrolytic decomposition process can be simplified as



The kinetic rate expression of the non-isothermal pyrolysis of a reaction (3) is dependent on the following equations [31].

$$\frac{d\alpha}{dt} = kf(\alpha) \quad (4)$$

$$k = Aexp\left(-\frac{E}{RT}\right) \quad (5)$$

$$T = T_0 + \gamma t \quad (6)$$

where  $\alpha$  is the fraction thermally decomposed,  $f(\alpha)$  a function depending on the degree of the reaction,  $k$  the reaction rate constant,  $t$  the reaction time,  $\gamma$  the linear heating rate and  $T$  is the absolute temperature.

Eqs. (4) and (6) can be arranged into the following equation.

$$\frac{d\alpha}{dt} = f(\alpha) \frac{A}{\gamma} \exp\left(-\frac{E}{RT}\right) \quad (7)$$

In this paper,  $\alpha$  is defined as  $m_0$

$$\alpha = \frac{1 - m_i}{1 - m_0} \quad (8)$$

where  $m_i$  and  $m_0$  are the instantaneous and the final values of the mass fractions, respectively.  $f(\alpha)$  can be defined as

$$f(\alpha) = (1 - \alpha)^n \quad (9)$$

Putting Eq. (9) into Eq. (7) yields

$$\frac{d\alpha/dT}{(1 - \alpha)^n} = \frac{A}{\gamma} \exp\left(-\frac{E}{RT}\right) \quad (10)$$

Coats and Redfern [31] integrated Eq (10) by expanding it into a series with boundary conditions of  $\alpha = 0$  for  $T = T_0$  and  $\alpha = \alpha$  for  $T = T$  for the boundary conditions. For  $n \neq 1$ , the result is

$$\frac{1 - (1 - \alpha)^{1-n}}{(1 - n)T^2} = \frac{AR}{\gamma E} \left(1 - \frac{2RT}{E}\right) \exp\left(-\frac{E}{RT}\right) \quad (11)$$

Assuming  $2RT/E \ll 1$  Eq. (11) can be simplified into the form

$$\ln\left(\frac{1 - (1 - \alpha)^{1-n}}{(1 - n)T^2}\right) = \ln\left(\frac{AR}{\gamma E}\right) - \left(\frac{E}{RT}\right) \quad (12)$$

For  $n \neq 1$ , the integration of Eq. (12) yields

$$\ln\left(\frac{-\ln(1 - \alpha)}{T^2}\right) = \ln\left(\frac{AR}{\gamma E}\right) - \left(\frac{E}{RT}\right) \quad (13)$$

The basic assumptions in the above equation are that the reaction is completely kinetic controlled and pyrolysis conforms to a first order reaction. By using the  $\alpha$  values from the TGA data, a plot of left side of Eq. (13) versus  $1/T$  will yield straight lines. The values of the Pre-exponential factor (A) and the Activation energy (E) can be found from the ordinate intercept and the slope of this line [33].

### III EXPERIMENTS

#### III.I Preparation of biomass samples

The authors sampled the stalks of an energy crop, *Cynara Cardunculus*. This is an abundant species in the Mediterranean region. Around 100 g of plant were brought to the laboratory, washed with ultra-pure water and oven-dried for 24 hours at 100 °C. Dry samples were then grounded and sieved to pass through 250  $\mu\text{m}$  mesh, then kept to the desiccators. The sieved sample was stored in plastic jars for experiments. All the thermal analysis was performed on this sample. The proximate analysis was carried out through the method in the American Society for Testing Materials (ASTM) (D 2016-74, D 1102-84, and E 870-82). The ultimate analysis was carried out using an element analyzer (LECO CHNS 932). Inorganic contents of the samples were performed using AAS-310 Flame Photometer. The calorific value of the samples was determined using Gallenkamp Auto Bomb Calorimeter. The results of the proximate, ultimate and inorganic elemental analysis of the biomass sample are shown in Table 1.

**Table 1**

Proximate, ultimate, and inorganic content of the biomass samples

Proximate analysis (wt%, dry ash free)	
Moisture	6.79
Volatile matter	72.16
Fixed carbon	10.81
Ash	10.24
Ultimate analysis (wt%, dry ash free)	
C	40.49
H	5.43
O	51.28
S	Negligible
N	0.8
Empirical formula	$\text{CH}_{1.609}\text{O}_{0.949}\text{N}_{0.013}$
Calorific value (MJ/kg)	
Gross Calorific Value	21.02
Main inorganic elements (ppm)	
Ca	0.55
Mg	0.1
Fe	508
Zn	78
K	0.15


### III.II Thermogravimetric analysis

A Shimadzu Simultaneous 60H apparatus was used to give the TG and DTG experimental data for biomass decomposition at different heating rates. The experiments were performed with a carrier flow rate of N<sub>2</sub> 50 ml/min. The heating rates were programmed at 5, 10, 20, and 30 °C min<sup>-1</sup>. Throughout the experiments, the mass loss (TG signal) and the rate of mass loss (DTG signal) as a function of temperature were simultaneously recorded, as the samples were exposed to a adjusted temperature program. Although many mathematical methods can be used to calculate the kinetic of solid-state reactions, the Coats-Redfern method, in this study, was employed to determine the kinetic parameters.


### IV RESULTS AND DISCUSSIONS

The TG weight loss curves of Cynara Cardunculus at different heating rates (5, 10, 20, and 30 °C/min) were obtained in order to study the effect of heating rates on non-isothermal kinetics (Figures 1-4) As can be seen from the Figures 1-4, the TG and DTG curves of the biomass at the different heating rates were similar, indicating three regions in the pyrolytic decomposition process. The TG and DTG results for each region in the pyrolysis of Cynara Cardunculus are shown in Table 2 for the heating rates of 5, 10, 20 and 30 °C min<sup>-1</sup>. The first region is below 200 °C, where the water retained and the absorbed gases in the plant volatilize. The moisture and gases release of the sample started at around 60 °C and was completed in the interval of 181-211 °C, depending on the heating rates. In the first region, very little mass losses were observed (2.5-3.3 %). As the heating rate increases the drying temperature zone also increases. At the end of this region, the main thermal degradation took place between 181 and 415


°C. As can be seen in the sharp devolatilization process, the TG curves of the sample indicate two overlapping peaks. It has been well reported in the literature that lignocellulosic biomass is composed mainly of cellulose, hemicellulose and lignin and these compositions have a considerable effect on the biomass pyrolysis [40-45].

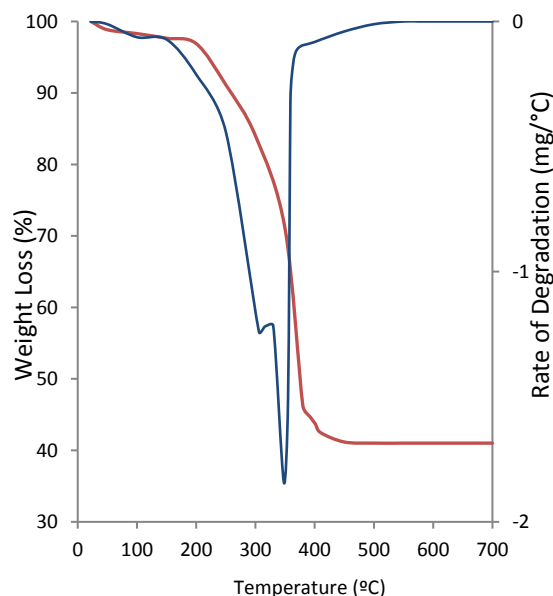


**Figure 1.** TGA and DTG curves of Cynara Cardunculus obtained with a linear rate of 5 °C/min under nitrogen atmosphere

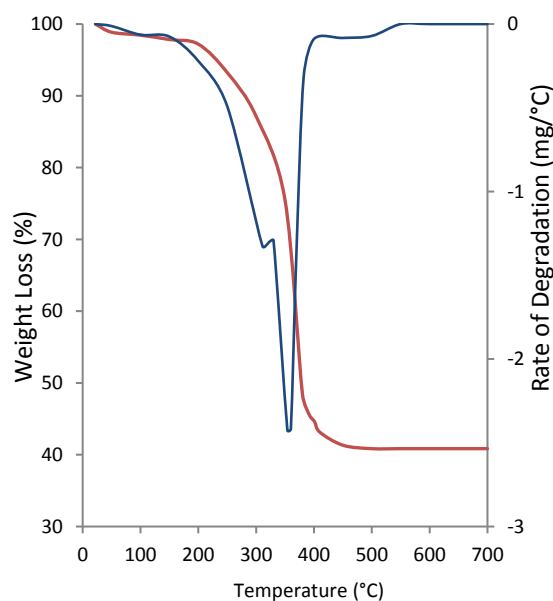

**Figure 2.** TGA and DTA curves of Cynara Cardunculus obtained with a linear rate of 10 °C/min under nitrogen atmosphere

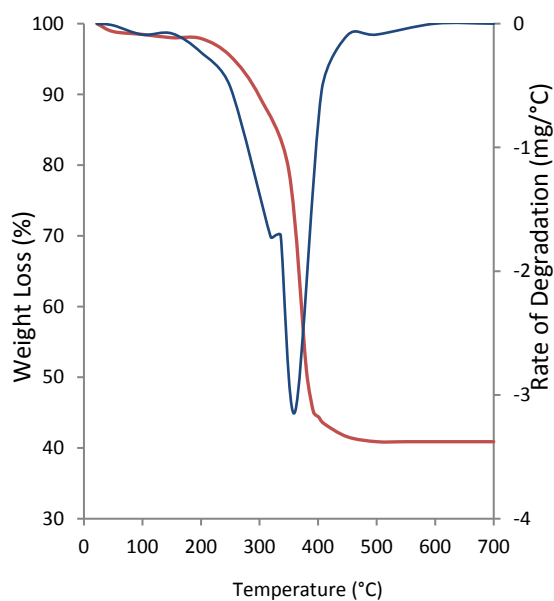

**Figure 3.** TGA and DTA curves of Cynara Cardunculus obtained with a linear rate of 20 °C/min under nitrogen atmosphere

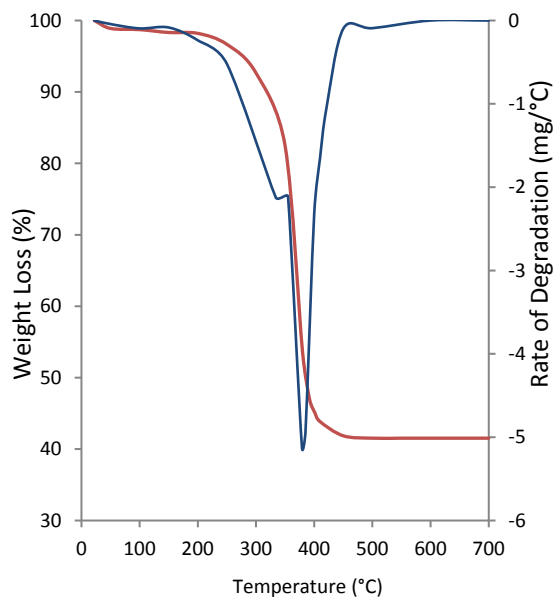

**Figure 4.** TGA and DTA curves of Cynara Carduculus obtained with a linear rate of 30 °C/min under nitrogen atmosphere

The derivative thermogravimetric (DTG) analysis of Cynara Cardunculus revealed that the thermal degradation of this biomass in the interval of 200-400 °C occurred in two peaks as shown in Figs. 1-4. The first peak occurred at 306-334 °C, while the second peak occurred at 348-379 °C, depending on the heating rates used. Wang et al. [46], Fernandez et al. [47], Moreira et al. [48], and Mansaray and

Ghaly [49] reported that three main constituents of biomass are chemically active and decompose thermochemically in the temperature range of 170-340 °C for hemicellulose, 280-360 °C for cellulose and 260-490 °C for lignin.

**Table 2**

TG and DTG results of cynara cardunculus ( $T_{max}$  is the peak temperature corresponding to a maximum mass loss for hemicellulose and cellulose, respectively;  $T_f$  is the final temperature of the process;  $DTG_{max}$  is the largest value in the thermal decomposition process; and  $T_{DTGmax}$  is the temperature belonging to  $DTG_{max}$ ; and  $R_s$  final residue at 700 °C)


Heating rate (°C min <sup>-1</sup> )	5	10	20	30
<b>Region 1</b>				
Weight Loss (%)	3.3	3	2.7	2.5
Initial weight loss temperature	60	65	67	68
Maximum weight loss temperature	84	89	101	103
Final weight loss temperature	181	183	205	211
<b>Region 2</b>				
Weight Loss (%)	52.85	52.97	53.14	54.01
Initial weight loss temperature	181	183	205	211
$T_{max1}$ (°C)	306	311	319	334
$DTG_{max1}$ (mg/°C)	1.242	1.327	1.724	2.124
Maximum weight loss temperature ( $T_{max2}$ )	348	354	361	379
$DTG_{max2}$ (mg/°C)	1.843	2.426	3.131	5.128
Final weight loss temperature ( $T_f$ )	402	405	412	415
<b>Region 3</b>				
Weight Loss (%)	1.16	2	2.2	2.3
Initial weight loss temperature	402	405	412	415
Final weight loss temperature ( $T_f$ )	454	462	471	477
Residue, % $R_s$	38.47	39.15	39.89	41.03

Accordingly, the first step of weight loss in the second region could be ascribed to the thermal decomposition of hemicellulose and the first stages of cellulose, while the second thermal degradation step in this region belongs to the final stages of cellulose decomposition and the first stages of lignin decomposition. Therefore, the first peak corresponds to hemicellulose (306-334 °C) and the second one corresponds to cellulose (348-379 °C). The peak belonging to lignin is entirely overlapped by the

other two peaks. The cellulose thermal degradation was almost completed. It can be observed from Table 2 that it is clearly seen that the heating rates have a considerable effect on the maximum weight loss and the rate of decomposition and also shift the weight loss and rate of decomposition to higher temperatures. This can be ascribed to the increase in the rate of heat transfer and the longer exposure of the biomass particles to a particular temperature along with elevating heating rates. Thermal degradation percentages in the second region obtained at the final temperatures have been found to be very close (52.85-54.01 %). No significant differences have been observed in thermal degradation for the experiments carried out at the heating rates of 5, 10, 20 and 30 °C min<sup>-1</sup>. Between the temperatures of 390-415 °C, a slow weight loss occurred. In the third region, over around 415 °C, the TG curves obtained at different heating rates reaches a common plateau value, approximately 40 wt%. Similar results were reported by Singh et al. [37] and Ali et al. [40] for banana leaves and Malaysian wood species, respectively.

In order to evaluate the decomposition kinetics of biomass particles, the kinetic parameters were calculated by applying Eq. (13) introduced and derived in Section II. Figure 5 shows that the plot of  $-\ln \frac{-\ln(1-\alpha)}{T^2}$  versus  $1/T$ , indicating that the thermal decomposition reaction of Cynara Cardunculus could be assumed by a first order reaction in the studied temperature region for every heating rate from the slope and ordinate intercept of the line, the values of the Activation Energy, E, and Pre-exponential Factor, A, can be obtained. Table 3 indicates the Arrhenius parameters of thermal decomposition kinetics of Cynara Cardunculus at four different heating rates, using the Coats-Redfern method.

As can be seen from Table 3, all the regression coefficients ( $R^2$ ) are larger than 0.998, which shows that the first order reaction model assumed conforms to the experimental data very well in the studied temperature zone. The heating rates have some impact on Arrhenius parameters, i.e. the activation energy and pre-exponential factor. The activation energy and pre-exponential factor rose from 61.13 KJ/mol and  $4.56 \times 10^7 \text{ min}^{-1}$  to 66.44 KJ/mol and  $8.63 \times 10^7 \text{ min}^{-1}$ , respectively, with the increase of the heating rate from 5 to 30 °C min<sup>-1</sup>. This is attributed to the combined synergic effect of the heat transfer at different heating rates and thermal decomposition kinetics of Cynara Cardunculus [38-45].

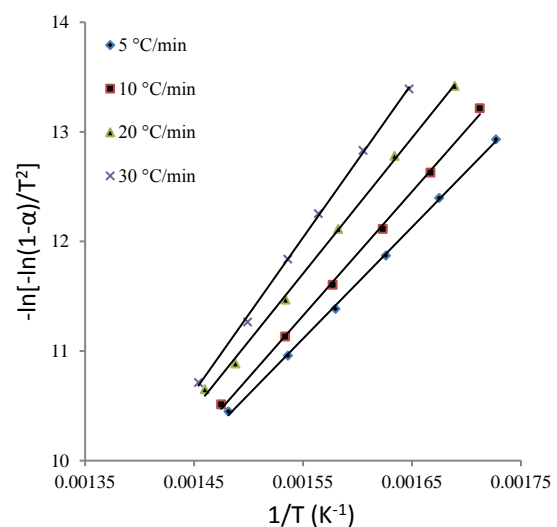

**Figure 5.** Plot of  $-\ln[-\ln(1-\alpha)/T^2]$  versus  $1/T$  of Cynara Cardunculus pyrolysis at different heating rates

**Table 3**

Kinetic Parameters of Cynara Cardunculus

Heating Rate (°C min <sup>-1</sup> )	Studied Temperature Zone ( $T_f - T_{max1}$ ) (°C)	$-\left(\frac{dw}{dt}\right)_{max2}$ (mg/°C)	E (KJ/mol)	A (min <sup>-1</sup> )	R <sup>2</sup>
5	306-402	1.843	61.13	$4.56 \times 10^7$	0.999
10	311-405	2.426	64.12	$5.12 \times 10^7$	0.998
20	319-412	3.131	65.21	$6.29 \times 10^7$	0.998
30	334-415	5.128	66.44	$8.63 \times 10^7$	0.999



## V CONCLUSIONS

The thermogravimetric analysis helps investigate physical and chemical properties and thermal behavior of biomass sample. Evaluating the kinetic parameters also represents valuable information to design and operate more effective thermal conversion systems and optimum pyrolysis operating conditions. In this study, TGA and DTG data were employed under non-isothermal conditions at four different heating rates to investigate pyrolytic thermal decomposition of biomass (*Cynara Cardunculus*). The pyrolysis process of *Cynara Cardunculus* can be divided into three regions. The first region is a loss of moisture from the sample. The second region occurs around 181-415 °C and reflects largely the thermal degradation of cellulose, hemicellulose and lignin. In the third regions, the TG curves obtained at different heating rates reached a common value, approximately 40 wt%. The overall thermal degradation was observed in the range of 181 to 415 °C. The kinetics of *Cynara Cardunculus* thermal decomposition can successfully be modeled by a scheme consisting of single step decomposition reactions of three main components, cellulose, hemicellulose and lignin. The kinetic parameters were calculated with the Coats-Redfern method, depending on a first-order reaction. The regression analysis data of *Cynara Cardunculus* thermal decomposition fitted the first-order kinetics very well ( $\sim R^2 = 0.998$ ) The Arrhenius parameters, Activation Energy (E) and Pre-exponential Factor (A) were calculated for the heating rates of 5, 10, 20 and 30 °C min<sup>-1</sup>. The authors found that the values of the activation energy and pre-exponential factor were in the range of 61.13 to 66.44 KJ/mol and of  $4.56 \times 10^7$  to  $8.63 \times 10^7$  min<sup>-1</sup>, respectively, depending on the heating rates. The heating rate has

some effect on the thermal decomposition kinetics of *Cynara Cardunculus*.

## REFERENCES

- [1] Z. Chen, X. Huang, C. Huang, Y. Yang, H. Yang, J. Zhang, T. Huang, "High atmospheric wet nitrogen deposition and major sources in two cities of Yangtze River Delta: Combustion-related NH<sub>3</sub> and non-fossil fuel NO<sub>x</sub>", *Science of The Total Environment*, 806, 1, 150502, 2022.
- [2] S. Yorgun, Y.E. Şimşek, "Fixed-Bed Pyrolysis of *Miscanthus x giganteus*: Product yields and Bio-Oil characterization", *Energy Sources*, 25, 79-90, 2003.
- [3] Y. Feng, K. Qui, Z. Zhang, C. Li, M. Rahman, J. Cai, "Distributed activation energy model for lignocellulosic biomass torrefaction kinetics with combined heating program", *Energy, Part C*, 239, 1222228, 2022.
- [4] R.M. Roewell, "The chemistry of solid wood. ACS Advances in Chemistry Series", No: 207 Washington, DC: American Chemical Society, 1984.
- [5] X.U. Wang, J.E. Nie, N.D. Zao, ND, Y.C. Hou, Y.R. Guo, S. Li, Q.J. Pan, "Experimental and first-principle computational exploration on biomass cellulose/magnesium hydroxide composite: Local structure, interfacial interaction and antibacterial property", *International Journal of Biological Macromolecules*, 19, 584-590, 2021.
- [6] D.O. Glushkov, G.S. Nyashina, R. Anand, P.A. Strizhak, "Composition of gas produced from the direct combustion and pyrolysis of biomass", *Process Safety and Environmental Protection*, 156, 43-56, 2021.
- [7] M. Yang, J. Zhang, S. Zhong, T. Li, T. Lovas, H. Fatehi, X.S. Bai, "CFD modeling of biomass combustion and gasification in fluidized bed reactors using a distribution kernel method", *Combustion and Flame*, 236, 111744, 2022.
- [8] S. Yorgun, Y.E. Şimşek, "Catalytic pyrolysis of *Miscanthus x giganteus* over activated alumina", *Bioresource Technology*, 99, 8095-8100, 2008.
- [9] D. Magelhas, F. Kazanc, "Influence of biomass thermal pre-treatment on the particulate matter formation during pulverized co-combustion with lignite coal", *Fuel*, 308, 122027, 2022.





- [10] F. Abnisa, P.A. Alaba, "Recovery of liquid fuel from fossil-based solid wastes via pyrolysis technique: A Review", *Journal of Environmental Chemical Engineering*, 106593, 2021 (In Press, Journal Pre-proof).
- [11] J. Li, B. Dou, H. Zhang, B. Zhang, H. Chen, Y. Xu, "Thermochemical characteristics and non-isothermal kinetics of camphor biomass waste", *Journal of Environmental Chemical Engineering*, 9, 4, 105311, 2021.
- [12] J.J. Chew, M. Soh, J. Sunarso, S.T. Yong, V. Doshi, S. Bhattacharya, "Isothermal kinetic study of CO<sub>2</sub> gasification of torrefied oil palm biomass", *Biomass and Bioenergy*, 134, 105487, 2020.
- [13] Y. Rahib, B. Sarh, S. Bostyn, S. Bonnamy, T. Boushaki, J. Chaoufi, J, "Non-isothermal kinetic analysis of the combustion of argan shell biomass", *Materials Today: Proceedings*, 24, 1, 11-16, 2020.
- [14] R.S. Vaziri, M.U. Babler, "Modeling of slow pyrolysis of various biomass feedstock in a rotary drum using TGA data", *Chemical Engineering Processing and Processing-process Intensification*, 129, 95-102, 2018.
- [15] C. Jaroenkhasemmesuk, N. Tippayawong, N, "Thermal degradation kinetics of sawdust under intermediate heating rates", *Applied Thermal Engineering*, 103, 170-176, 2016.
- [16] Y. Yan, P.T. Clough, E.J. Anthony, "Investigation of the apparent kinetics of air and oxy-fuel biomass combustion in a spout fluidised-bed reactor", *Chemical Engineering Research and Design*, 153, 276-283, 2020.
- [17] S. Thompson, B.J. Howlin, C.A. Stone, I. Hamerton, "Exploring the thermal degradation mechanisms of some polybenzoxazines under ballistic heating conditions in helium and air", *Polymer Degradation and Stability*, 156, 180-192, 2018.
- [18] A. Zaker, Z. Chen, M.Z. Uddin, "Catalytic pyrolysis of sewage sludge with HZSM5 and sludge-derived activated char: A comparative study using TGA-MS and artificial neural networks", *Journal of Environmental Chemical Engineering*, 9, 5, 105891, 2021.
- [19] Y. Chen, C. Zhang, J. Song, X. Shang, X. Chen, J. He, "The silicothermic reduction of magnesium in flowing argon and numerical simulation of novel technology", *Journal of Magnesium and Alloys*, 8, 3, 752-760, 2020.
- [20] Q.V. Bach, W.H. Chen, "Pyrolysis characteristics and kinetics of microalgae via thermogravimetric analysis (TGA): A state-of-the-art review", 2017, *Bioresource Technology*, 88-100, 2017.
- [21] V. Mortezaeikia, O. Tavakoli, M.S. Khodaparasti, "A review on kinetic study approach for pyrolysis of plastic wastes using thermogravimetric analysis", *Journal of Analytical and Applied Pyrolysis*, 160, 105340, 2021.
- [22] E. Leng, Y. Guo, J. Chen, S. Liu, J. E, Y. Xue, "A comprehensive review on lignin pyrolysis: Mechanism, modeling and the effects of inherent metals in biomass", *Fuel*, 309, 122102, 2022.
- [23] Q.V. Bach, W.H. Chen, S. Chu, O. Skreberg, "Predictions of biochar yield and elemental composition during torrefaction of forest residues", *Bioresource Technology*, 215, 239-246, 2016.
- [24] H. Liu, M.S. Ahmad, H. Alhummade, A. Elkamel, S. Sammak, B. Shen, "A hybrid kinetic and optimization approach for biomass pyrolysis: The hybrid scheme of the isoconversional methods, DAEM, and a parallel-reaction mechanism", *Energy Conversion and Management*, 208, 112531, 2020.
- [25] M.T. Domingues, P. Madejon, M.J. Diaz, "Novel energy crops for Mediterranean contaminated lands: Valorization of *Dittrichia viscosa* and *Silybum marianum* biomass by pyrolysis", *Chemosphere*, 186, 968-976, 2017.
- [26] S. Paniagua, S. Reyes, F. Lima, N. Pilipenko, L.F. Clavo, "Combustion of avocado crop residues: Effect of crop variety and nature of nutrients", *Fuel*, 291, 119660, 2021.
- [27] I. Rodilla, M.L. Contreras, A. Bahillo, "Thermogravimetric and mass spectrometric (TG-MS) analysis of sub-bituminous coal-energy crops blends in N<sub>2</sub>, air and CO<sub>2</sub>/O<sub>2</sub> atmospheres", *Fuel*, 215, 506-514, 2018.
- [28] M. Nour, M. Amer, A. Elwardany, A. Attia, X. Li, S. Nada, "Pyrolysis, kinetics, and structural analyses of agricultural residues in Egypt: For future assessment of their energy potential", *Cleaner Engineering and Technology*, 2, 100080, 2021.
- [29] K.M. Akkoli, P.B. Gangavati, M.R. Ingalagi, R.K. Chitgopkar, "Assessment and Characterization



of Agricultural Residues”, *Materials Today: Proceedings*, 5, 9, 3, 17548-17552, 2018.

[30] A. Kanca, “Investigation on pyrolysis and combustion characteristics of low quality lignite, cotton waste, and their blends by TGA-FTIR”, *Fuel*, 263, 116517, 2020.

[31] A. Coats, J.P. Redfern, “Kinetic parameters from thermogravimetric data”, *Nature*, 201, 68, 1964.

[32] R. Xiao, W. Yang, X. Cong, K. Dong, J. Xu, D. Wang, X. Yang, “Thermogravimetric analysis and reaction kinetics of lignocellulosic biomass pyrolysis”, *Energy*, 201, 117537, 2020.

[33] Y.H. Khraisha, I.M. Shabib, “Thermal analysis of shale oil using thermogravimetry and differential scanning calorimetry”, *Energy Conversion and Management*, 43, 2, 229-239, 2002.

[34] M. Wang, X. Pan, Y. Xia, A. Zhu, Y. Wu, C. Fu, P. Zhang, J. Zhao, J. Li, J. Fu, “Effect of dewatering conditioners on pollutants with nitrogen, sulfur, and chlorine releasing characteristics during sewage sludge pyrolysis”, *Fuel*, 307, 121834, 2022.

[35] S. Huang, J. Qin, T. Chen, C. Yi, S. Zhang, Z. Zhou, N. Zhou, “Co-pyrolysis of different torrefied Chinese herb residues and low-density polyethylene: Kinetic and products distribution”, *Science of The Total Environment*, 802, 149752, 2022.

[36] H. Sattar, I. Muzaffar, S. Munir, “Thermal and kinetic study of rice husk, corn cobs, peanut crust and Khushab coal under inert (N<sub>2</sub>) and oxidative (dry air) atmospheres”, *Renewable Energy*, 149, 794-805, 2020.

[37] J.K. Singh, T. Patil, D. Pandey, S.P. Tekade, A.N. Sawarkar, “Co-pyrolysis of petroleum coke and banana leaves biomass: Kinetics, reaction mechanism, and thermodynamic analysis”, *Journal of Environmental Management*, 301, 113854, 2022.

[38] H.P. Nath, B.J. Dutta, D. Kalita, B.K. Saikia, N. Saikia, “Evaluation of the effect of high sulfur subbituminous coal on the devolatilization of biomass residue by using model free, model fitting and combined kinetic methods”, *Fuel Part B*, 122235, 2021.

[39] K. Phuakpunk, B. Chalermssinsuwan, S. Assabumrungrat, “Pyrolysis kinetic parameters investigation of single and tri-component biomass: Models fitting via comparative model-free methods”, *Renewable Energy*, 182, 494-507, 2022.

[40] S. Ali, S.A. Hussain, M.Z.M. Tohir, A.A. Nuruddin, “Investigation of kinetic decomposition characteristics of Malaysian wood species using Coats and Redfern (CR) method”, *Materials Today: Proceedings*, Part 1, 42, 178-185, 2021.

[41] Z. Xia, H. Yang, J. Sun, Z. Zhou, J. Wang, Y. Zhang, “Co-pyrolysis of waste polyvinyl chloride and oil-based drilling cuttings: Pyrolysis process and product characteristics analysis”, *Journal of Cleaner Production*, 318, 128521, 2021.

[42] B. Castells, I. Amez, L. Medic, J.G. Torrent, “Torrefaction influence on combustion kinetics of Malaysian oil palm wastes”, *Fuel Processing Technology*, 218, 106843, 2021.

[43] De M.V. Velden, J. Baeyens, A. Brems, B. Janssens, R. Dewil, “Fundamentals, kinetics and endothermicity of the biomass pyrolysis reaction”, *Renewable Energy*, 35, 232-42, 2010.

[44] M. Radojevic, B. Jankovic, D. Stojiljkovic, V. Jovanovic, I. Cekovic, M. Manic, M, “Improved TGA-MS measurements for evolved gas analysis (EGA) during pyrolysis process of various biomass feedstocks. Syngas energy balance determination”, *Thermochemica Acta*, 699, 178912, 2021.

[45] M. Arif, Y. Li, M.M. El-Dalatony, C. Zhang, X. Li, S. Salama, “A complete characterization of microalgal biomass through FTIR/TGA/CHNS analysis: An approach for biofuel generation and nutrients removal”, *Renewable Energy*, 163, 1973-1982, 2021.

[46] J. Wang, B. Shen, D. Kang, P. Yuan, C. Wu, “Investigate the interactions between biomass components during pyrolysis using in-situ DRIFTS and TGA”, *Chemical Engineering Science*, 195, 767-776, 2019.

[47] A. Fernandez, J. Soria, R. Rodriguez, J. Baeyens, G. Mazza, G, “Macro-TGA steam-assisted gasification of lignocellulosic wastes”, *Journal of Environmental Management*, 233, 626-635, 2019.

[48] R. Moreira, F. Bimbela, N.G. Lalaguna, J.L. Sanchez, A. Portugal, A, “Clean syngas production by gasification of lignocellulosic char: State of the art and future prospects”, *Journal of Industrial and Engineering Chemistry*, 101, 1-20, 2021

[49] K.G. Mansaray, A.E. Ghaly, “Thermal degradation of rice husks in nitrogen atmosphere”, *Bioresource Technology*, 65, 1-2, 13-20, 1998.



**Yunus Emre Şimşek** graduated from Chemical Engineering Department, Osmangazi University, Eskişehir in 1999, and received M.A.Sc., in 2002 and Ph.D. degrees in 2006 at Osmangazi University, Eskişehir. He worked in textile, dyestuff and publishing, and, machine, rubber and plastic industries in research and development positions. He was appointed as an Assistant Professor in 2015 in the Department of Chemical Process Engineering. His fields of interest are energy, biomass-biofuels and process optimization.

**Sait Yorgun** graduated from İstanbul Technical University in 1983. He received M.A.Sc in 1986 and

Ph. D degrees in 1993 at the same university. He employed as a research assistant in 1985-1993 at Osmangazi University. He has been a full professor since 2015 at Osmangazi University of Eskişehir. He specializes in biomass and biofuels, activated carbon, and adsorption.